
| Product | GD006 Intelligent Coin Validator |
|-----------------|--|
| | |
| Specification | Input Voltage: DC+12V±20% Work Temperature: -15℃~+75℃ Output: Pulse |
| | |
| Coin acceptance | 1 coin acceptance: 20mm -28mm in Coin diameter :1.4mm-2.8mm in thickness |
| | |
| Box Package | 50PCS/BOX G.W.12.5KG N.W. 12KG SIZE. 73*37*30CM |
| | |
| Single Package | 0.25KG/PC-WEIGHT 15.5*13*7CM/PC |
| | |

Product View



Operation

- 1.Press the function selector button when light on, insert and drop the coin that need to accepted 30 times to program the coin. When light off,it is ok.
- 2.Sensitive switch :Strict,Norma,Slack. Norma is default setting. If coin reject, Slack could be selected
- 3.Coin signal time for different machine.Fast: 20ms/short pulse signal Medium: 40ms/medium pulse signal Slow: 60ms/long pulse signal

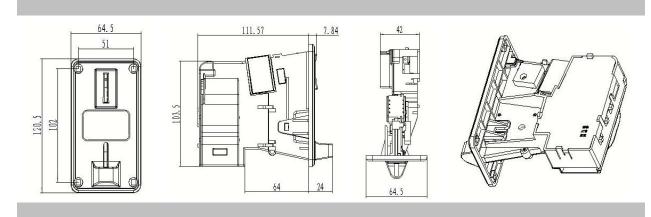

Cable Interface

- 1. Gray line— Counter
- 2. Black line— GND
- 3. White line—Coin signal
- 4. Red line— DC+12V





| History | 1996 into market,15 years long history model,Elite model |
|-------------|---|
| | |
| Application | Vending machine,gaming machine,jukebox,coinbox,cyber café,arcade crane,etc. |
| | |
| Standard | European standard |
| | |
| OEM | Accepted |
| | |
| Brand | GONDU |
| | |