
Product	GD100F Comparable Advanced Coin Validator
Specification	Input Voltage: DC+12V±20% Work Temperature: -15 ℃~+75 ℃ Output: Pulse
Coin acceptance	1 coin acceptance: 17 -29mm in Coin diameter :1.2-2.8mm in thickness
Box Package	50PCS/BOX G.W.18KG N.W. 17KG SIZE. 56*36*27.8CM
Single Package	0.30KG/PC-WEIGHT 18.3*6.9*13.5CM/PC

## **Product View**

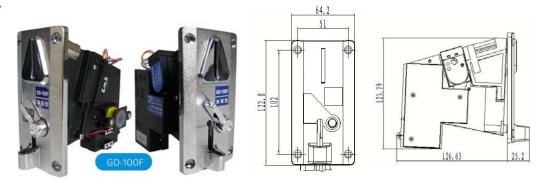

## Operation

- 1. Firstly remove the yellow plastic token& replace the coin to the clamp.
- 2. Choose N.O(Normal Open) or N.C(Normal Close) in coordination with the machine specification. (Normally Mario Machines should be N.C, Gaming Machines ,other machine should be N.O )  $\,$
- 3. Switch to "SW2":

Fast: 25ms/short pulse signal (Apply to Mario Machine)

Medium: 50ms/medium pulse signal (Apply to different machine) Slow: 100ms/long pulse signal (Apply to entertainment machine)

Notice: If coin-eating, please adjust the switch.

4. VR turning for sensitivity of coin acceptance: turn clockwise(+)for strict coin selecting anti-clockwise(-)for slack.

## **Cable Interface**

- 1. Gray line— Counter
- 2. Black line— GND
- 3. White line—Coin signal
- 4. Red line— DC+12V





History	2006 into market,8 years long history model
Application	Vending machine,gaming machine,jukebox,coinbox,cyber café,arcade crane,etc.
Standard	European standard, Especial handle high-value coins, such as USD, EURO, UK-P, etc
OEM	Accepted
Brand	Gondu